




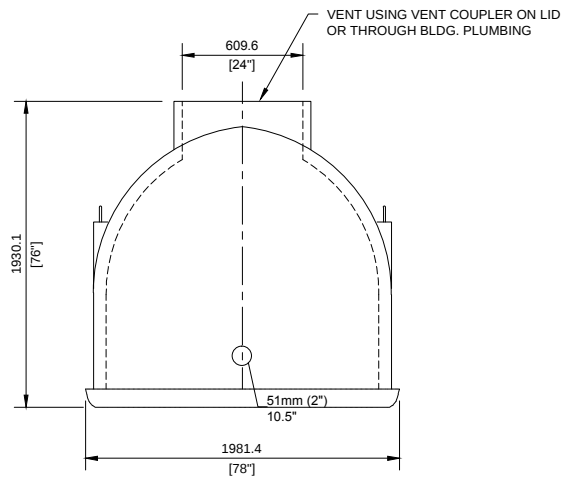


**RIGHT END VIEW**

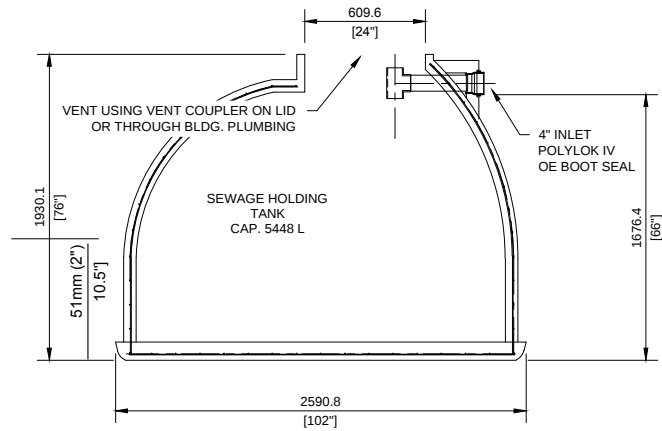

**X-SECTION**  
1:30

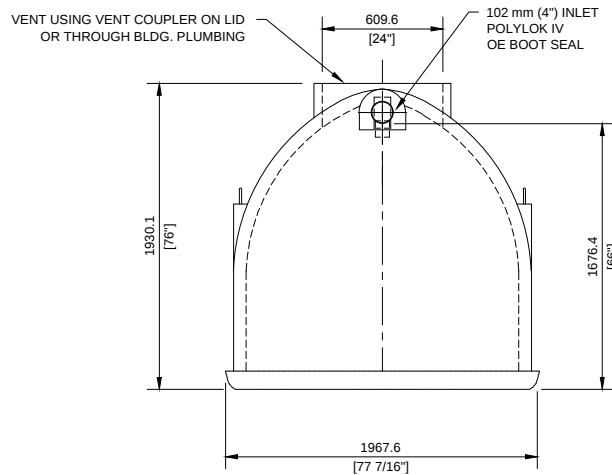

**LEFT END VIEW**

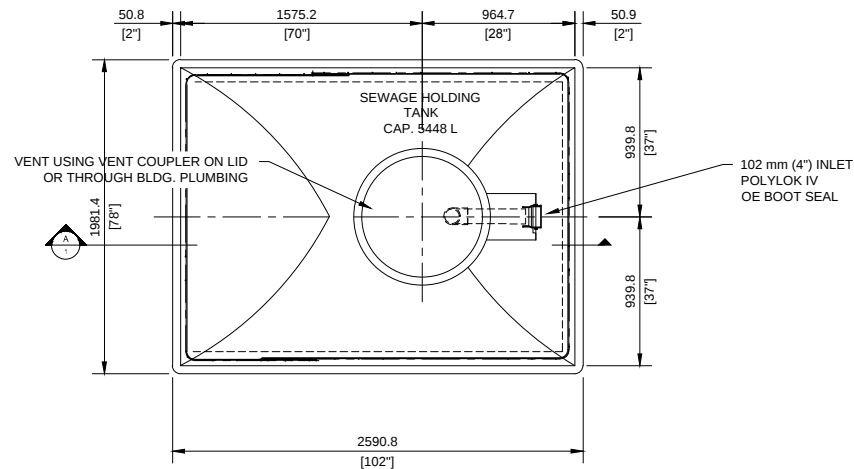

**PLAN VIEW**

| MODEL:             | HT-1200 |         | TOTAL CAP:     | ???? LITRES |         | WORKING CAP:  | 5448 LITRES |        | CONCRETE SPECIFICATIONS |           |
|--------------------|---------|---------|----------------|-------------|---------|---------------|-------------|--------|-------------------------|-----------|
| CSA APPROVED       | IMP.    | METRIC  | INLET HEIGHT:  | IMP.        | METRIC  | LIQUID DEPTH: | IMP.        | METRIC | MINIMUM STRENGTH:       | 32 mPa    |
| WIDTH:             | 78"     | 1981 mm | 66"            | 1676 mm     |         | FLUSH VOL.:   | N/A         | N/A    | FIBER REINFORCEMENT:    | 1.5" SIKA |
| LENGTH:            | 102"    | 2591 mm | OUTLET HEIGHT: | N/A         | N/A     | MAX. COVER:   | N/A         | N/A    | CEMENT TYPE:            | 50        |
| HEIGHT:            | 76"     | 1930 mm | WEIGHT:        | 10000 lbs   | 4536 kg |               |             |        | WATER TO CEMENT RATIO:  | 0.35      |
| MAX. BURIAL DEPTH: | 1830 mm |         | SERIAL #:      |             |         | DATE:         |             |        | AIR ENTRAINMENT:        | 5 - 7%    |