




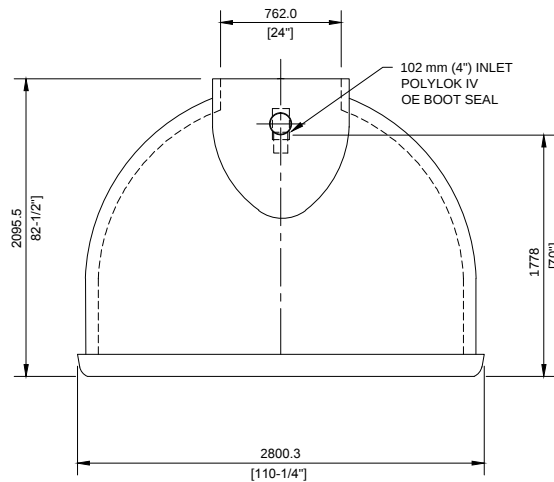


RIGHT END VIEW

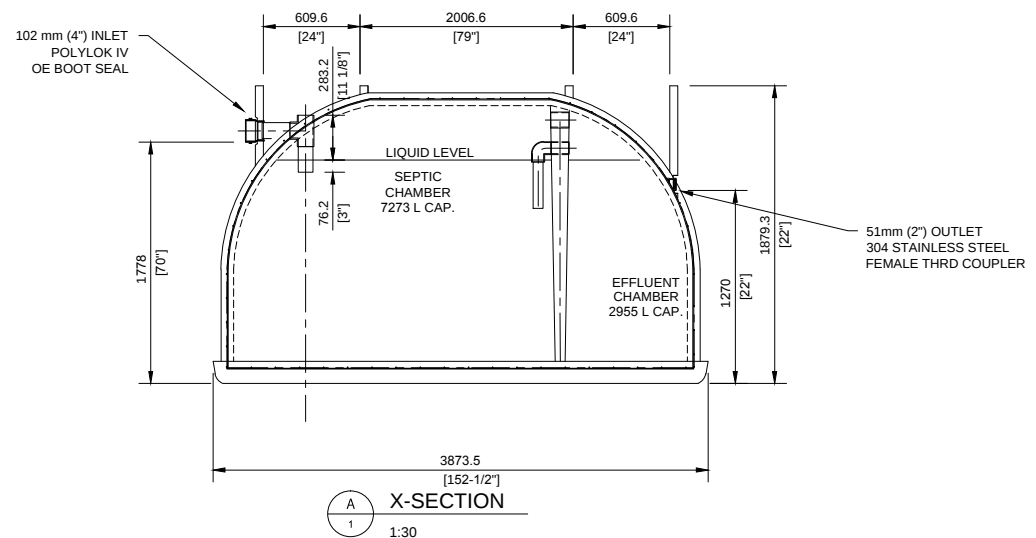

X-SECTION
1:30

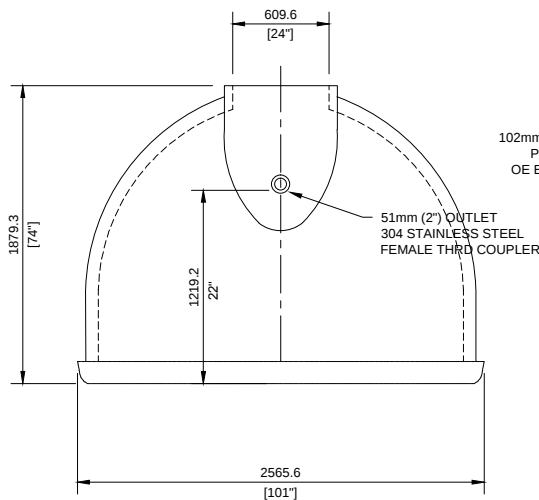

LEFT END VIEW

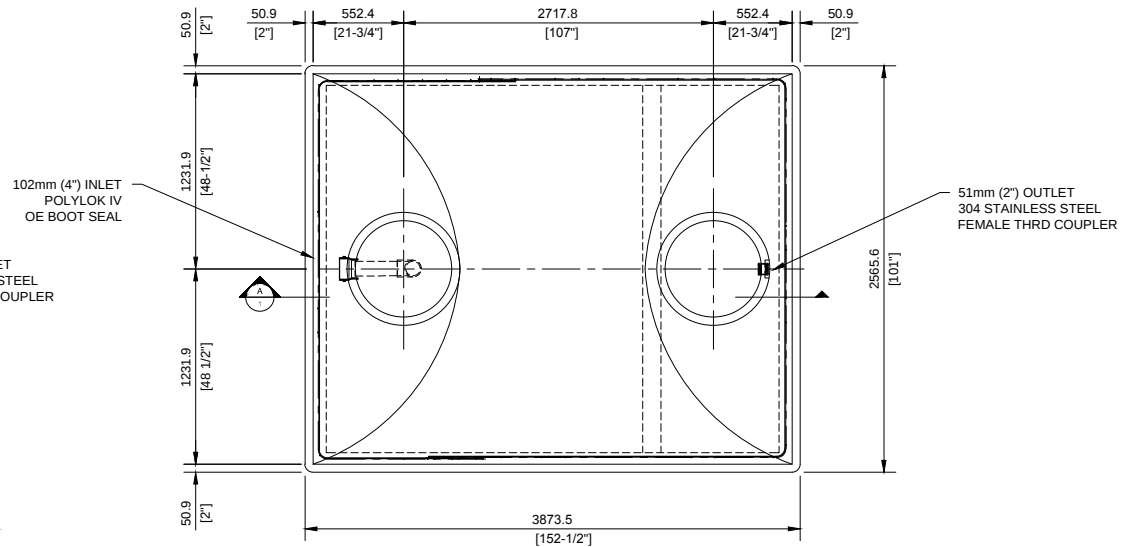

PLAN VIEW

MODEL:	WC 1600		TOTAL CAP:	10227 LITRES		WORKING CAP:	5230 LITRES		CONCRETE SPECIFICATIONS	
CSA APPROVED	IMP.	METRIC	IMP.	METRIC	IMP.	METRIC	IMP.	METRIC	MINIMUM STRENGTH:	32 mPa
WIDTH:	110-1/4"	2800 mm	INLET HEIGHT:	70"	1778 mm	LIQUID DEPTH:	57"	1447 mm	FIBER REINFORCEMENT:	SIKA PPF
LENGTH:	152-1/2"	3873 mm	OUTLET HEIGHT:	22"	1270 mm	FLUSH VOL.:	NA		CEMENT TYPE:	GUB-30f
HEIGHT:	82-1/2"	2095 mm	WEIGHT:	18739 lbs	8500 kg	MAX. COVER:	"	mm	WATER TO CEMENT RATIO:	0.35
MAX. BURIAL DEPTH:	mm		SERIAL #:			DATE:			AIR ENTRAINMENT:	5 - 8%